

PHL-BRG7-INE39



LED高天井灯／E39



IP65 防水



AC100-277V 50/60Hz



取付簡単



180lm/ W

使用温度範囲：-20°～+50°

保存温度範囲：-40°～+80°

オプション

電源	色温度	口金	照射角度
電源収納一体型 100V対応/PSE	3000K 4000K 5000K 5700K	E39	90° 120°

使用施設例

倉庫 工場 展示会 体育館 屋内 屋外など様々な場所に最適。





PHL-BR-HBL-02-G7
90°

PHL-BR-HBL-02-G7(B)
120°


仕様

品番	消費電力	発光効率	全光束	演色性	重量	配光角
PHL-BRG7-06010850-INE39-90	60W	180 lm/W	10,800lm	> 70	1.64kg	90°
PHL-BRG7-08014450-INE39-90	80W	180 lm/W	14,400lm	> 70	1.64kg	90°
PHL-BRG7-10018050-INE39-90	100W	180 lm/W	18,000lm	> 70	1.64kg	90°
PHL-BRG7-12021650-INE39-90	120W	180 lm/W	21,600lm	> 70	1.64kg	90°
PHL-BRG7-06009650-INE39-120	60W	160 lm/W	9,600lm	> 70	1.42kg	120°
PHL-BRG7-08012850-INE39-120	80W	160 lm/W	12,800lm	> 70	1.42kg	120°
PHL-BRG7-10016050-INE39-120	100W	160 lm/W	16,000lm	> 70	1.42kg	120°
PHL-BRG7-12019250-INE39-120	120W	160 lm/W	19,200lm	> 70	1.42kg	120°


配光曲線

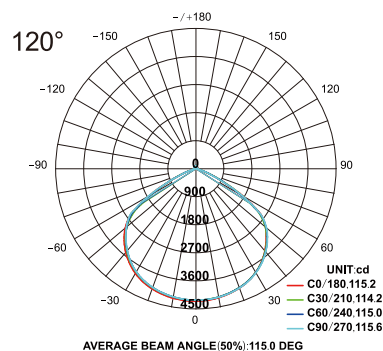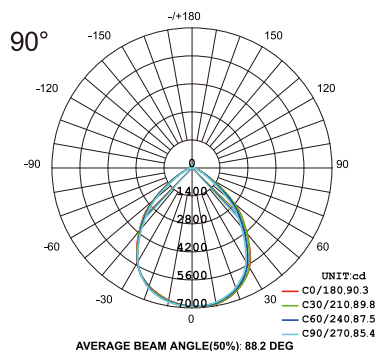

寸法(mm)

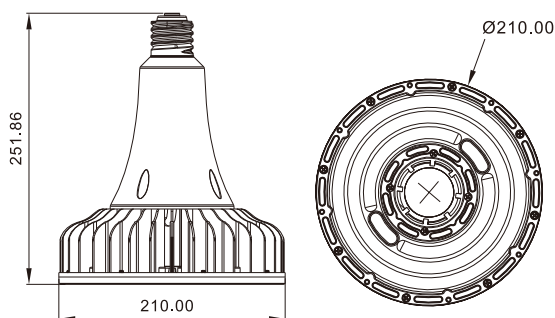

HBL60W/80W/100W/120W-02-G7

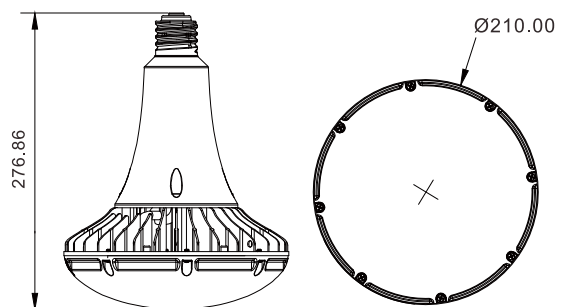

HBL60W/80W/100W/120W-02-G7(B)



株式会社ペンタクト

〒271-0067 千葉県松戸市樋野口660 TEL.047-701-8525 FAX.047-701-8526 E-Mail : pentact@pentact.co.jp URL : https://pentact.co.jp